



LEA-5 Module Series

u-blox 5 GPS and GALILEO Receivers

Preliminary Data

Overview

The LEA-5 module series brings the high performance of the u-blox 5 positioning engine to the industry standard LEA form factor. These versatile, stand-alone receivers combine an extensive array of features with flexible connectivity options. Their ease of integration results in fast times-to-market for a wide range of automotive, consumer and industrial applications with strict size and cost requirements.



22.4 x 17.0mm

*your position
is our focus*



Highlights

- 50-channel u-blox 5 engine with over 1 million effective correlators
- <1 second Time To First Fix for Hot and Aided Starts
- -160dBm SuperSense[®] sensitivity
- Accelerated startup at weak signals with KickStart feature
- Supports AssistNow Online and AssistNow Offline A-GPS services; OMA SUPL compliant
- High immunity to jamming
- Hybrid GPS, GALILEO and SBAS (WAAS, EGNOS, MSAS, GAGAN) engine
- 4 Hz position update rate
- Easy migration from LEA-4 modules


Features

	Power	Size	Memory	Function				Antenna		Input / Output							
	Voltage Range (V)	Thickness (mm)	Programmable (Flash) FW Update	Low Power Modes	KickStart	Dead Reckoning	Raw Data	Precision Timing	Antenna Supply	Antenna Supervisor	UART	USB	SPI	DDC (I ² C compliant)	Reset Input	Configuration Pin	
LEA-5H	2.7-3.6	3	•	P	•				•	•	1	1		1	•		
LEA-5S						•				•	•	1	P		1	•	1
LEA-5A											•	•	1	P		1	•
LEA-5T ¹			2.4	•		•			•	•	•	1	1		1	•	
LEA-5Q						•						1	1	•	1	•	3
LEA-5M												1	1		1	•	2

P= Planned availability Q1/09

¹See LEA-5T Product Summary (GPS.G5-MS5-07105)

Mechanical Data

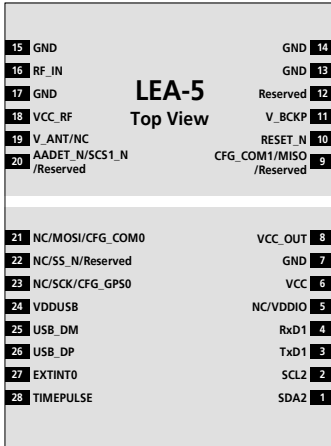

Dimensions 22.4mm x 17.0mm

Weight 2.1 g

Receiver Performance Data

Receiver Type 50-channel u-blox 5 engine
 GPS L1 C/A code
 GALILEO L1 Open Service (with upgrade)
 SBAS: WAAS, EGNOS, MSAS, GAGAN

Max. Update Rate 4 Hz

Accuracy¹ Position 2.5 m CEP
 SBAS 2.0 m CEP

Acquisition¹

	LEA-5H/5S/5Q/5T	LEA-5A/5M
Cold starts:	29 s	32 s
Warm starts:	29 s	32 s
Aided starts ² :	<1 s	<1 s
Hot starts:	<1 s	<3 s

Sensitivity³

	LEA-5H/5S/5Q/5T	LEA-5A/5M
Tracking:	-160 dBm	-160 dBm
Reacquisition:	-160 dBm	-160 dBm
Cold starts:	-144 dBm	-143 dBm

A-GPS Supports AssistNow Online and AssistNow Offline, OMA SUPL compliant

Operational Limits Velocity: 515 m/s (1000 knots)

Operating Temp. -40°C to 85°C

Storage Temp. -40°C to 85°C

¹ All SV @ -130 dBm

² Dependent on aiding data connection speed and latency

³ Demonstrated with a good active antenna

Interfaces

Serial Interfaces 1 UART
 1 USB V2.0 Full Speed 12 Mbit/s
 1 DDC (I²C compliant)
 1 SPI

Digital I/O Configurable time pulse
 1 EXTINT input
 1 Reset
 1 Configuration Pin (LEA-5A, LEA-5S)

Serial and I/O Voltages 3 V levels

Protocols NMEA, UBX binary

Electrical Data

Power Supply 2.7 to 3.6 V

Power Consumption 126 mW @ 3.0V Eco Mode
 141 mW @ 3.0V Max. Performance Mode

Backup Power 1.4 V to 4.8 V, 25µA

Antenna Type Active and Passive

Antenna Power External or Internal VCC_RF

Antenna Supervision Integrated short-circuit detection and antenna shutdown, open circuit detection is supported with AADET_N input and little external circuitry

Support Products

u-blox 5 Evaluation Kits

Evaluation Kit Suitable for

EVK-5H: u-blox 5 Evaluation Kit with KickStart LEA-5H, LEA-5S, LEA-5Q

EVK-5P: u-blox 5 Evaluation Kit with SuperSense® LEA-5A, LEA-5M

EVK-5T: u-blox 5 Evaluation Kit with Precision Timing LEA-5T

Ordering Information

LEA-5H-0 LEA-5H – u-blox 5 GPS/GALILEO Module

LEA-5S-0 LEA-5S – u-blox 5 GPS/GALILEO Module

LEA-5A-0 LEA-5A – u-blox 5 GPS/GALILEO Module

LEA-5T-0 LEA-5T – u-blox 5 GPS/GALILEO Module with Precision Timing

LEA-5Q-0 LEA-5Q – u-blox 5 GPS/GALILEO Module

LEA-5M-0 LEA-5M – u-blox 5 GPS/GALILEO Module

Available as samples and tape on reel (250 pieces)

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.